



Aliveriou 4-6 | 34133 | Chalkida  
T : 22210 29303



## Specification Guide for "Log House" wooden houses of Easy Green July 2021

The "Log" Efficient Houses of Easy Green are made of wooden frame and they are completely anti-seismic, extremely compact and fully waterproof with the ideal thermal and sound insulation conditions.

### Log House exterior wall construction system

**The Easy Green has developed the following exterior wall construction system (from exterior to interior) :**

- ✓ Massif or Glulam log section 90 \* 167mm\* residual relative humidity 12% ± 2%, longitudinal shrinkage below 1,5% ± 0,5%.
- ✓ Interior wooden frame 50\*100mm per 600mm.
- ✓ Mineral wool insulation 100 mm with  $\lambda = 0,040$  W/mK at the middle of the wooden frame.
- ✓ Breathable ventilation membrane.
- ✓ Wood lining (groove planks) 15mm. (fire and waterproof resistant gypsum board 12, 5 mm on the inside wall of the bathrooms).
- ✓ Thermal coefficient  $U = 0,29$  W/m<sup>2</sup>k.
- ✓ Total thickness 205mm.

*\*choice between massif or glulam and between different cross sections.*

### Interior wall construction system

**All the interior walls are designed such as:**

- ✓ Wooden frame 50\*100mm per 600mm.
- ✓ Mineral wool insulation 50mm with  $\lambda = 0,040$  W/mK at the middle of the wooden frame
- ✓ Bilateral wood lining(groove planks) 15mm (fire and waterproof resistant gypsum board 12, 5 mm on the inside wall of the bathrooms).
- ✓ Room height 2,65m
- ✓ Total thickness 125mm.
- ✓ Average weight 29.50 kg /m<sup>2</sup>.

*\*\*choice between massif or glulam and between different cross sections.*



Aliveriou 4-6 | 34133 | Chalkida  
T : 22210 29303

## **Mezzanine and attic floor**

**The mezzanine floor are designed from below to top:**

- ✓ Wooden floor beams 75\* 150mm (or different cross section depending at the structural analysis) .
- ✓ Wood roof lining(spruce) 15mm (residual relative humidity 16% ±2% ).
- ✓ Polyethylene film as a vapor barrier 0,2mm.
- ✓ Wooden beams 50\*50mm.
- ✓ Chipboard PB 18mm
- ✓ Mineral wool insulation 50mm between the beams.
- ✓ Laminate floor lining (wooden floor with extra cost)

## **Roof construction**

**The roof construction model consists of the following elements:**

Easy Green roofs offer a guaranteed lasting protection and durability. All exposed structural timber surfaces are properly coated and protected. All the visible parts of the ceiling are made of planed timber which impregnated with color. Maximum loading (snow load) 100kg / m<sup>2</sup>.

**Four or two pitched roofs are constructed as follows (inside to outside layers):**

- ✓ Wood roof lining(spruce) 15mm (residual relative humidity 16% ±2% ).
- ✓ Polyethylene film as a vapor barrier 0,2mm
- ✓ Wooden roof beams type H 50 \* 200mm for downside open roofs. (high ceiling)
- ✓ Wooden grids 50 \*150mm connected with bolted plates for downside closed roofs. (flat ceiling)
- ✓ Breathable waterproof membrane.
- ✓ Wooden frame 35\*45mm for ventilation
- ✓ Mineral wool insulation 150 mm with  $\lambda = 0,040$  W/mK (only when underneath lies an accessible room).
- ✓ OSB oriented standard board 15mm.
- ✓ Bituminous waterproofing breathable membrane (common type).
- ✓ Bitumen roof tiles, in the color of choice
- ✓ Overall thickness 293mm .
- ✓ Thermal coefficient  $U = 0,25$  W/m<sup>2</sup>k

## **Windows and balcony doors**

- ✓ White PVC .
- ✓ Frames designed for tilt-and-turn (in double windows only one sheet can be tilted).
- ✓ Argon gas double glazing with low emissivity film (low-e).
- ✓ Thermal coefficient  $U_g = 1,0$  W/m<sup>2</sup>k  $U_f = 1,1$  W/m<sup>2</sup>k.
- ✓ Metal knobs (white electrostatic paint)
- ✓ Exterior wooden threshold



Aliveriou 4-6 | 34133 | Chalkida  
T : 22210 29303

### **Entrance doors**

- ✓ Single shielded security door (without side panel).
- ✓ Single shielding, 14 locking points.
- ✓ Adjustable hinges.
- ✓ Security lock, handles, 180 degrees panoramic peephole.
- ✓ External white aluminum lining.

### **Electrical installation**

- ✓ Entire electrical installation in accordance with Greek law and european standards
- ✓ The positions of the lights, switches and sockets are selected according to customer's wishes.
  
- ✓ Cables used depending on the task: 3\*1,5mm NYL & NYA, 3\*2,5mm NYL NYA, 3\*6mm NYL , 5\*10+1,5mm NYL & NYY, UTP KAT6, TV cable.
- ✓ Main panel with 3-lines HAGER automatic electric fuses and Circuit Breaker separated per floor..
- ✓ Modular DIN Rail (fuses, switches, Circuit Breaker) SCHNEIDER.
- ✓ VALENA plugs and switches of LEGRAND house series (Neutral white or Classic crème color).
- ✓ All connections are instated inside junction boxes and are accessible in any case of damage or modification necessity.

#### **The electrical installation includes:**

##### **Entrance**

- ✓ Line for entrance external light, 3\*1,5 cable.
- ✓ Line for entrance internal light, 3\*1,5 cable.
- ✓ Internal and external light simple switches, 3\*1,5 cable.

##### **w.c.**

- ✓ Simple switch with one lighting line, 3\*1,5 cable
- ✓ Socket next to mirror, 3\*2,5 cable.

##### **Bathroom**

- ✓ ASimple switch with one lighting line, 3\*1,5 cable
- ✓ Socket next to mirror, 3\*2,5 cable.

##### **Storage Room**


- ✓ Simple switch with one lighting line, 3\*1,5 cable.

##### **Kitchen**

- ✓ Simple switch with one lighting line, 3\*1,5 cable.
- ✓ 1 supply line for the oven, 3\*6 cable.
- ✓ 1 supply line/socket for dishwasher, 3\*2,5 cable
- ✓ 1 supply lines for 2 sockets for other kitchen electrical appliances, 3\*2,5 cable..

##### **Lounge / dining room**

- ✓ Simple switch with one lighting line, 3\*1,5 cable.
- ✓ 1 supply line for 2 sockets, 3\*1,5 cable..

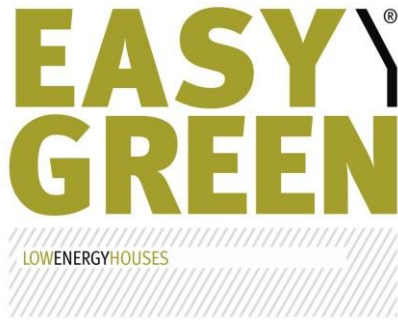

Aliveriou 4-6 | 34133 | Chalkida  
T : 22210 29303

### Bedrooms

- ✓ Simple switch with one lighting line, 3\*1,5 cable.
- ✓ 1 supply line for 2 sockets, 3\*1,5 cable.

### Exterior

- ✓ Simple switch with one lighting line, 3\*1.5 cable. (for balconies or ground floor terrace).

### Stairs

- ✓ Simple switch with one lighting line, 3\*1,5 cable..

## Plumbing installation

- ✓ Pipes for hot and cold water with 20mm thermo welding from INTERPLUST.
- ✓ Drainage systems for sanitary equipment with tube 40mm and 57mm SPIRAL SOLIDRAIN.
- ✓ Main drains fitted with FASO PLAST 6 atm pipe (100mm and 63mm).

### Residential plumbing installations included:

- ✓ Kitchen: including supply plumbing of hot-cold water, wash basin and dishwasher drain.
- ✓ Bathroom: including supply plumbing of hot-cold water and drainage pans, wash basin, tub.
- ✓ WC typical: including supply plumbing of hot-cold water and drainage pans, wash basin.
- ✓ WC with shower: including supply plumbing of hot-cold water and drainage pan, wash basin, shower
- ✓ Balcony: Supply plumbing of one cold water faucet.
- ✓ All drains and supplies included are set inside the residence and over the surface of the basement/foundation slab. Not included: links to the external wastewater network reception, holding tank and plumbing work outside the contour of floors.

*\*one washing machine plumbing per residence*

## Sanitary Equipment

- ✓ Basin with flush and toilet seat lids, market price 135 € + VAT
- ✓ Wash basin for the bathroom, market price 70 € + VAT.
- ✓ Wash basin for WC, market price 60 € + VAT.
- ✓ Bathtub, market price 233 € + VAT.
- ✓ Shower where applicable 80X80cm, market price 70€ + VAT.
- ✓ Tub faucet, market price 90 € + VAT.
- ✓ Washbasin faucet, market price 65 € + VAT.
- ✓ Mirror inox 20s, market price 80 € + VAT.
- ✓ Bathroom accessories wash basin towel rail, tub's towel rail, cases for toothbrushes, soap, sponge and toilet paper, market price 75 € + VAT

### Sanitary Equipment included:

- ✓ Bathroom: bathtub, lavatory pans with toilet flush, wash basin, mirror and bathroom accessories.
- ✓ WC with shower: basin with flush, shower, wash basin, mirror and bathroom accessories
- ✓ WC typical: basin with flush, wash basin, mirror and WC accessories

# EASY GREEN<sup>®</sup>

LOWENERGYHOUSES

Aliveriou 4-6 | 34133 | Chalkida  
T : 22210 29303

## Screed

### **Ground floor above the basement or foundation slabs**

- ✓ Filling composed of 30 mm expanded polystyrene, and 65 mm lightweight screed topped with cement mortar.

### **Upper floor**

- ✓ Filling with expanded polystyrene and lightweight screed with total thickness 180 mm. (in case of ceramic tiles)
- ✓ Drywall filling consisting of wooden beams and OSB 15mm. (in case of wood or laminate floor)

## Tile lining

### **Wall tiles (bathrooms - kitchen)**

- ✓ Maximum cover in height from the floor in bathrooms and WC: 2,20m.
- ✓ Maximum cover in total area in kitchen: 4 m<sup>2</sup> \*.
- ✓ Maximum tile value selection 14,00 € + VAT.
- ✓ The tile installation has been tallied parallel-vertical to the walls.  
Diagonal placement or parquet type installation, installation without seams, designs, edging as listello, torelli, webbings and elaborated motifs, larger tiles, mosaic, and bevel cutting of the corners are extra charged. Tile coverings less than 0.60 m are calculated in current measure value no less than 60% of the price of 1 m<sup>2</sup>.

*\* All the offers are not calculated on the kitchen plan but rather on the maximum expected kitchen area.*

### **Ceramic floor Tiles (Rooms: kitchen, bathroom, WC, living room, storeroom, corridor, entrance)**

- ✓ Maximum selection tile value included in overall cost quotation: 10,00 € + VAT. .
- ✓ Skirting floor included.
- ✓ The tile installation has been tallied parallel-vertical to the walls.  
Diagonal placement or parquet type installation, installation without seams, designs, edging as listello, torelli, webbings and elaborated motifs, larger tiles, mosaic, and bevel cutting of the corners are extra charged.

## Floor linings with synthetic parquet ( laminate )

### **Rooms: Bedrooms and upstairs corridor, hallway**


- ✓ Produced by Kronotex (made in Germany) thickness 7mm and 8mm.
- ✓ Series Basic, Smart, Dynamic. .
- ✓ Substrate 3mm of polyethylene foam
- ✓ Skirting floor included.

## Coloring-Decoration

- ✓ Plastic color (ecology) on the walls according to customer's wishes.
- ✓ Exterior colors for walls with colored elastic plaster facade according to customer's wishes.
- ✓ Crown moulding.

## Interior Doors

- ✓ Internal hinged laminate doors\*, without a special design, with a curved laminated frame, door sill with rubber, inox hinge, double barrel type, inox handle
- \*All offers are calculated with hinged doors - sliding option comes with additional charge*

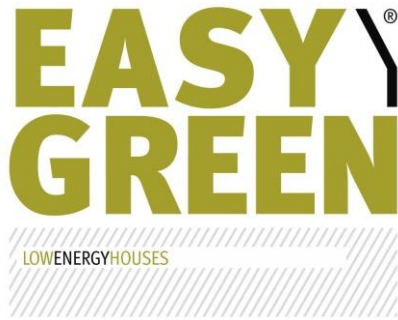

Aliveriou 4-6 | 34133 | Chalkida  
T : 22210 29303

## **Kitchen cabinets**

**Kitchen cabinets made of white melamine boxes 18mm and melamine shutters (soft form).**

### **Included :**

- ✓ Kitchen bench 4cm waterproof.
- ✓ Upper cabinets 72 cm.
- ✓ Plastic adjustable legs.
- ✓ Aluminium baseboards .
- ✓ Hinges with brakes from Blum.
- ✓ Rails with brake from Blum.
- ✓ Plate racks.
- ✓ Cutlery case.
- ✓ Plastic waste basket.
- ✓ Single inox handles 9.6cm
- ✓ Double sink Pyramis, market price 50 € + VAT .
- ✓ Calculated total kitchen length\* (top and bottom) for 'Prime' houses: 4m.

*\*All the offers are not calculated on the kitchen plan but rather on the maximum expected kitchen area.*

## **Wardrobes**

**Wardrobes are made of white melamine 16mm and melamine doors (soft form).**

### **Included:**

- ✓ Plastic adjustable legs .
- ✓ Aluminium baseboard.
- ✓ 1 hanging bar and 1 shelf per wardrobe.
- ✓ One independent internal drawer.
- ✓ Single inox handles.

**For each room :** Dimension of the wardrobe 265\*120cm.

*\* All the offers are not calculated based on the floor plan instead based on the rooms as above.*

## **Staircase**

### **Upper floor staircase (where needed):**

- ✓ Wooden type (without riser) with an external massif beech façade 40mm thick, tread from massif-laminated beech 40mm thick according to the chosen design. The banister may be wooden lathe-worked, or metallic in different colors with an additional cost.

## **Remarks**

Easy Green reserves the right to change the options of supplying companies, materials and methods of construction, for any reason and without prior notice. All work refers to the construction of the house inside the building's contour and above the foundation slab or plate basement..